

SILOX-DIM

T8 Retrofit LED Tube 22W



- Perfect for main lighting
 - Optimal usage with ITF
 - Standard G13 socket for direct 230 VAC
 - full dimmable
 - flickerfree
-
- direct connection to 230 VAC
 - Not compatible with electronic or magnetic ballasts



Brief Description: **ILOX SILOX 3000K**

230 VAC - 50/60 Hz

Rotary base: G13

FI = 0.02

Beam Angle

Avg. : 123,6°

Max. : 140.0°

Full dimmable (with trailing-edge dimmer)

Light efficiency:

110 Lumen / Watt

Light quality:

CRI: 83,4

Color temperature:

3138 K


Accessories:



ITF-S120



ITF-D120



Universal Knop
Dimmer TKC-300




Dimmer controller
EPU-1500



Sunlight simulator
SLS-1+



Customized solutions

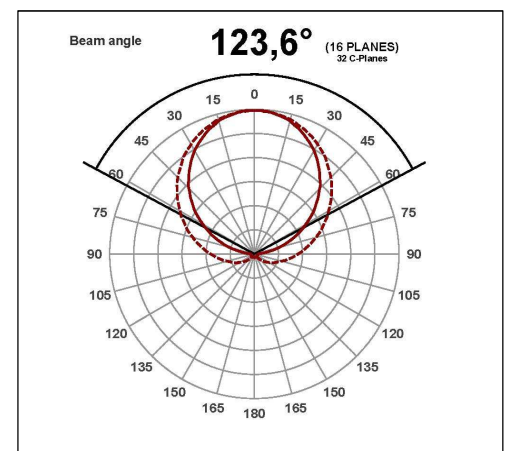

LAE-Anlagenbau GmbH · Altenwalder Chaussee 94 -100

27472 Cuxhaven · Bundesrepublik Deutschland

Telefon: 0 47 21 – 1 05-0 · Telefax: 0 47 21 – 1 05-2 10

Livestock Animal Equipment